

FPGA Based Digital Video Adapter

- ◆ Receive or transmit DVI digital video
- ◆ Receive or transmit HOTLink serial data
- ◆ Front panel I/O for HOTLink 1
- ◆ Support for popular chassis including VME and cPCI
- ◆ Fully programmable FPGA for unique interface requirements
- ◆ Stand-alone desktop capable
- ◆ Supports AH-64D DVI-I, DVI-II, and DVI-III (MTADs and Displays)
- ◆ Supports F/A-18 MFCDU
- ◆ Supports AIM-9x seeker interfaces
- ◆ Air-cooled and conduction-cooled versions available



The GDVA is a versatile digital video adapter. It allows for the real-time conversion of avionics standard digital video formats transmitted over HOTLink physicals to be converted to standard commercial DVI formats. This enables commercial DVI monitors to be used in development and testing instead of high cost avionics grade displays. The GDVA also enables standard PC video to be used in place of actual platform video data sources or sensors. This capability can be used to generate a DVI video test pattern that can be output to the avionics display.

The GDVA unit integrates a Xilinx Virtex II FPGA with Panellink and HOTLink transceivers. The board is managed by a Microchip PIC controller. Both the PIC and the FPGA are fully programmable to support many unique user configurations. The Panellink and HOTLink transceivers can be configured in any combination of receiver and/or transmitter.

The unit is available in a desktop version as well as air-cooled, 3U CPCI and 6U VME conduction cooled optional configurations.



Engineering Solutions for Critical Environments

Hardware Specification

Video Standards Supported

- ◆ DVI I, II, and III
- ◆ VESA

FPGA

- ◆ Xilinx Virtex II Pro
- ◆ Up to 400+ MHz clock rate
- ◆ Full duplex RocketIO™ serial transceivers

HOTLink II

- ◆ Cypress, serial transceiver
- ◆ Up to 1.5Gb/s serial data rate
- ◆ Second generation HOTLink, backward compatible
- ◆ Supports 8B10B encoding
- ◆ Built-in self-test
- ◆ Low Power

PanelLink

- ◆ Silicon Image, DVI video transceiver
- ◆ DVI 1.0 and VESA compliant
- ◆ Supports 24-bit/pixel, 16.7M true color
- ◆ I²C slave programming interface
- ◆ Up to 165 Mpixel/second

Microcontroller

- ◆ Microchip PIC18
- ◆ 40 MHz clock rate
- ◆ 16 Kbytes RAM, 32 Kbytes Flash
- ◆ Enhanced USART
- ◆ I²C Master and Slave modes
- ◆ 100,000 write cycles
- ◆ Low Power

Software Support

FPGA

- ◆ Xilinx Integrated Software Environment (ISE)
- ◆ Extensive DSP library
- ◆ Over 200 IP cores available

Microcontroller

- ◆ Tools
- ◆ Extended ISA


This product overview identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which GEICO may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. GEICO reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. GEICO does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes GEICO's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

GEICO, Inc.


Email Contact: info@geicoinc.com

Subject to change without notice, E&OE. Pub: EN-070510-023-A (2/2). © 2009 GEICO, Inc

GEICO GDVA Transmit Digital Video Adapter

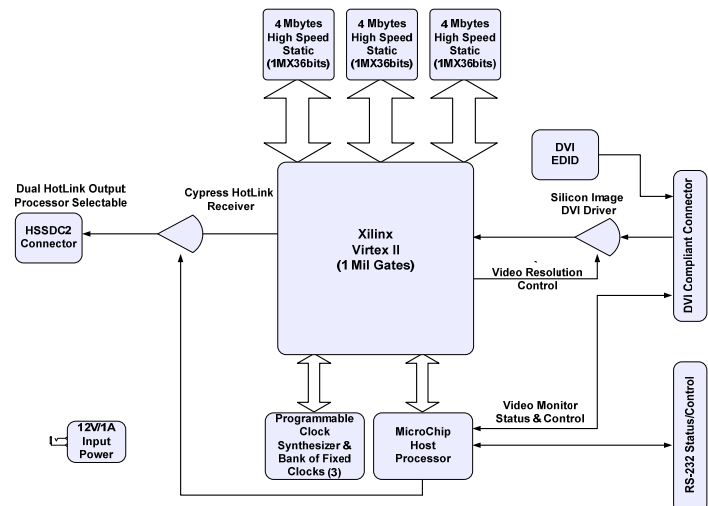

GEICO GDVA Receive Digital Video Adapter

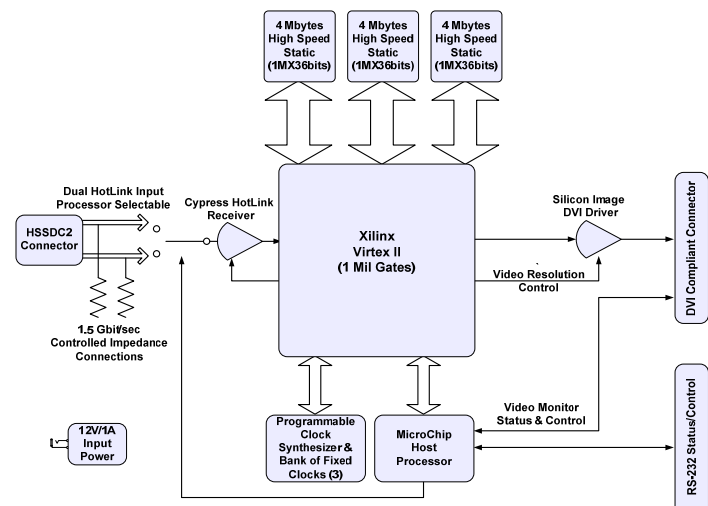

GEICO can provide off-the-shelf units pre-programmed to your specific requirements, or we can provide the development tools required for you to implement your own unique requirements.

For more information on how GEICO can work with you to meet your product or system needs, or offer design services to complement your own staff, please contact us.

GEICO and the Stylized GEICO Logo are registered in the U.S. Trademark Office. CompactPCI and PICMG are registered trademarks of the PCI Industrial Computer Manufacturers Group. All other product or service names are the property of their respective owners.

Geico, Inc
1754 North 48th Street
Mesa, Arizona, 85205



Tel: +1 480 222 6800 Fax: +1 480 222 6808

www.geicoinc.com